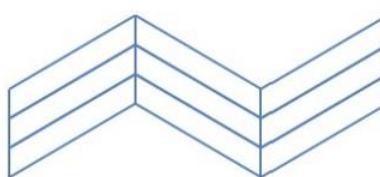



## CARATTERISTICHE TECNICHE OAK **CARAVAGGIO**

1. **Product description:** (Quercus Petrae) Parquet oak CARAVAGGIO
2. **Board sizes:** 14x90x600
3. **Top layer:** 3,4 mm (nominal)
4. **Finishing:** grading ACTIVE, "Masteroil", brushed, micro-bevel on 4 sides
5. **Incastro:** T&G



**Figura 1,2** Illustrative Photo. The picture shows only the characteristics of grade

Slipperiness	USRV 40 x Oiled	EN 14342 - 2013	
Fire Resistance	Cfl-s1	EN 14342 - 2013	
Formaldehyde Emission	E1	EN 717- 1 : 2004-10	
Thermal Conductivity	0,14 W/(m*K)	EN 14342 - 2013	
Bending Strength	3240N	EN 14342 - 2013	
Content of PCP	<5	CEN/TR 14823:2004	

### CARATTERISTICS:

The oak used for the top layer comes from certified German or French forests, the middle–and back layer wood is harvested on Indonesian plantations

Knots are allowed in unlimited size and number

Sound knots have to be 5 mm away from the edge, cracked knots are filled with brown putty filler

Cracks and holes, filled with brown putty filler, and a width of max. 2 mm and

100 mm length are allowed. Sapwood is allowed. Putty filler is allowed on every board

Color variations are allowed. Top layer: WoCa ready to use oil. A second oiling of the installed flooring is not necessary.

Suitable for underfloor heating systems – please check the installation manual for further information! For maintenance and care use the CAVINATO “M&C” recommended products, for the validity of the guarantee.